


Rohrschalldämpfer SDF

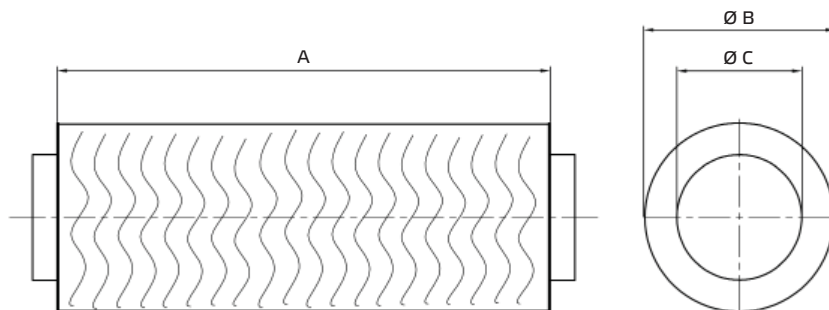

Typ	ID	Nennweite mm	A mm	Ø B mm	Ø C mm	Gewicht kg
SDF 100	102699	100	1000	200	100	2,4
SDF 125	102700	125	1000	225	125	2,5
SDF 150	102702	150	1000	250	150	2,7
SDF 160	102703	160	1000	250	160	2,8
SDF 200	102704	200	1000	300	200	3,5
SDF 250	102705	250	1000	355	250	4,9
SDF 315	102706	315	1000	400	315	5,9
SDF 355	102707	355	1000	450	355	6,9
SDF 400	102708	400	1000	500	400	7,4

- Rohrschalldämpfer, flexibel
- Schalldämmung, 50 mm
- Stahlblech, verzinkt

Einfügungsdämpfung dB

Typ	Oktavbänder Hz							
	125	250	500	1000	2000	4000	8000	16000
SDF 100	8	10	20	17	18	19	15	7
SDF 125	6	12	25	26	30	30	18	10
SDF 150	5	10	24	24	28	25	22	19
SDF 160	5	11	23	28	34	26	21	26
SDF 200	2	9	19	25	27	18	20	19
SDF 250	1	8	19	25	25	16	15	15
SDF 315	0	5	10	22	16	13	14	14
SDF 355	4	7	14	24	14	11	12	10
SDF 400	2	3	10	18	10	8	7	6